





VDI SAFETY

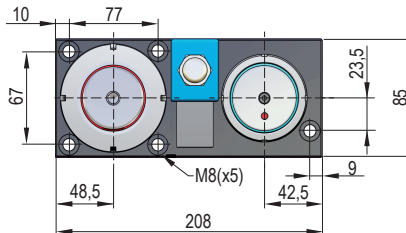

The TPCBS 1500 model is also available equipped with RMF-D1. (TPCBS 1500x...C-Linked)

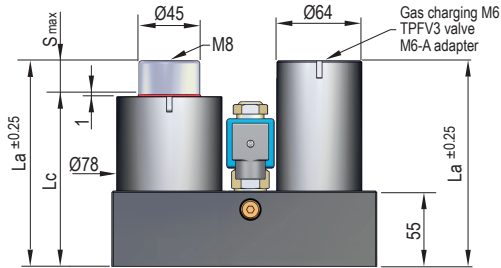

Code	Smax mm	La mm	Lc mm	Fa daN	90% F daN	100% Fc daN	P Bar
TPCBS 1500x12	12	124	112	1500 ±5% (20°C)	1545	1555	90 (20°C)
TPCBS 1500x25	25	150	125		1610	1630	
TPCBS 1500x38	38	176	138		1650	1675	
TPCBS 1500x50	50	200	150		1675	1705	
TPCBS 1500x63	63	226	163		1690	1725	
TPCBS 1500x80	80	260	180		1710	1750	
TPCBS 1500x100	100	300	200		1725	1765	
TPCBS 1500x125	125	350	225		1740	1785	

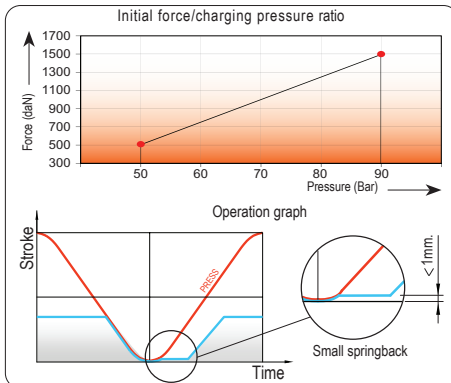

Pressure medium	Nitrogen (N ₂) / Oil
Max. charging pressure	90 Bar
Min. charging pressure	50 Bar
Rod seal area	15,90 cm ²
Operating temperature	0°C - 60°C
Force increase by temperature	0,33 %/°C
Max. stem speed	25 - 30 m/min
Max. recommended strokes/min	8 - 25* spm



Required information	
Working stroke	(mm)
Press speed	(m/min)
Maximum production rate	(spm)
Working pressure	(bar)

* Maximum rate will depend on working parameters

