

i

MICRO

TITAN

TPH

TPS

TPSP

TPF

TPK

TPC

TPR

TPB

TPHC

TPA

TPG

TPCT

TPSL

STOP

CYLINDER

STOP





CYLINDER

TPSR

TPSRs

TPNS




TPHT

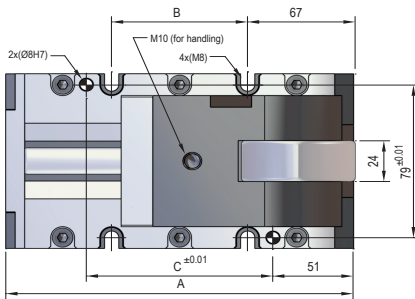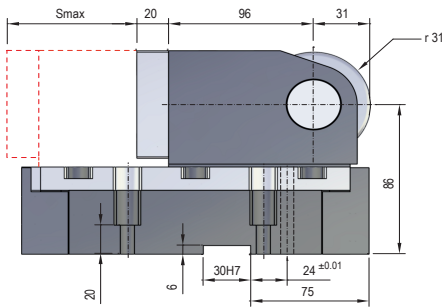

Code	A mm	B mm	C mm
TPRC 3000x50	190	56	88
TPRC 3000x80	220	86	118

Code	Smax mm	Max. punching force	Gas spring force		Gas spring model	ISO VDI	Max. working specs		Max. width of driver	Kg
			Initial daN	Final daN			Velocity	Strokes / min		
TPRC 3000x50-1	50	3000 daN	400	≈ 600	TPK 32x50 YW		0,5 m/s	40 spm	35 mm	9,2
TPRC 3000x50-2			200	≈ 270	TPS 32x50.2 YW	✓				
TPRC 3000x50-3			350	≈ 520	MICRO32VSx50 YW	✓				
TPRC 3000x80-1	80	3000 daN	400	≈ 600	TPK 32x80 YW		0,5 m/s	35 spm	35 mm	10,0
TPRC 3000x80-2			200	≈ 270	TPS 32x80.2 YW	✓				
TPRC 3000x80-3			350	≈ 520	MICRO32VSx80 YW	✓				

Working force distribution



Maximum force that can be applied to the punch depending on eccentricity, so that the stress in the assembly is the same as it was when the punch was completely centred.

How to order

TPRC 3000	x	80	-	1
Code	Stroke	Gas spring model		
			TPK 32	TPS 32.2
			MICRO 32VS	ISO

Maximum inclination

