

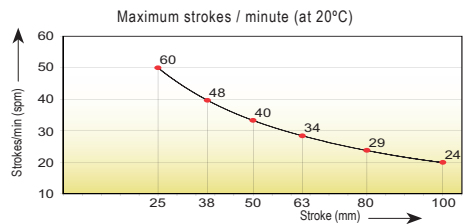
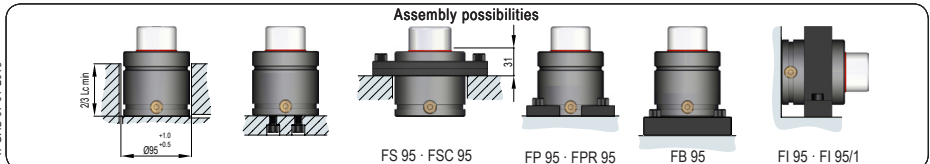


i Pressure medium	Gas Nitrógeno (N₂)
Max. charging pressure	150 Bar
Min. charging pressure	35 Bar
Rod seal area	28,27 cm²
Operating temperature	0°C - 80°C
Force increase by temperature	0,33 %/°C
Max. stem speed	1,6 m/s
Maintenance kit	Kit C4000

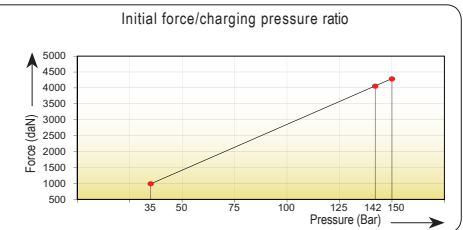

Code	Smax mm	La mm	Lc mm		Fa daN		F daN		Fc daN		P Bar		V l		Kg
TPC 4000x25	25	155	130	4000 ±5% (20°C)	6115		6115		6490		142 (20°C)		0,185		4,20
TPC 4000x38	38	181	143				6285		6705				0,268		4,90
TPC 4000x50	50	205	155				6380		6830				0,343		5,30
TPC 4000x63	63	236	173				6450		6915				0,425		6,10
TPC 4000x80	80	270	190				6505		6990				0,532		7,20
TPC 4000x100	100	310	210				6550		7045				0,657		7,80

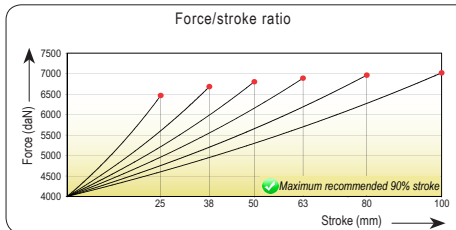

TPGAS 07-01-2018

