



Code	Smax mm	A mm	B mm	Max. punching force	Gas spring force		Gas spring model	Max. working specifications		Application
					Initial	Final		Velocity	Strokes / min	
TPCH 7500x25	25	110	230	7500 daN	600 daN	≈ 860 daN	TPK 600x25 TPK 600x50 TPK 600x80	20 m/min	40 spm	Round and shaped
TPCH 7500x50	50	110	255						30 spm	
TPCH 7500x80	80	140	315						20 spm	

Working angle

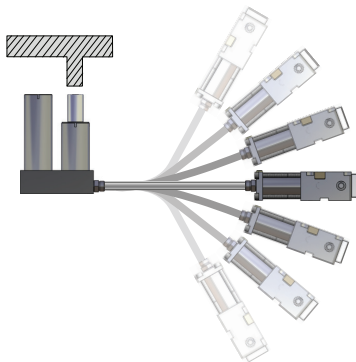

The working cam can work freely in space, at any angle and in any position.

Working cam / drive unit cylinder stroke ratio

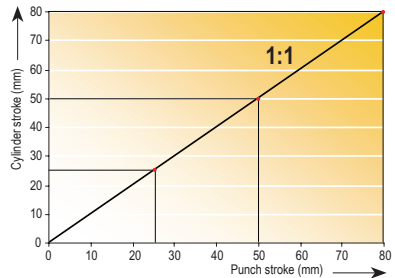

TFGAS 06/07-2015