



- i
- MICRO
- TITAN
- TPH
- TPS
- TPSP
- TPF
- TPK
- TPC
- TPR
- TPB
- TPHC
- TPA
- TPG
- TPCT
- TPSL
- STOP CYLINDER
- STOP CYLINDER
- TPSR
- TPSR
- TPNS
- TPHT
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-

RMF-M

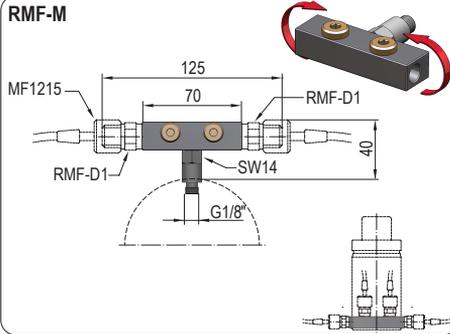


RMF-MC

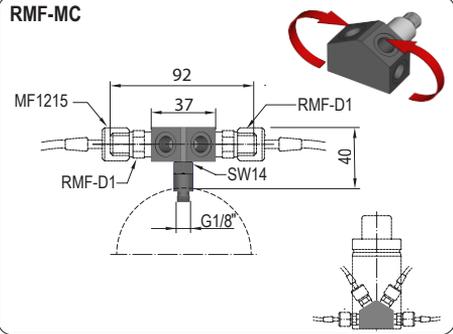


RMF-R

G1/8 male - G1/8 female




RMF-R-M6


M6 male - G1/8 female

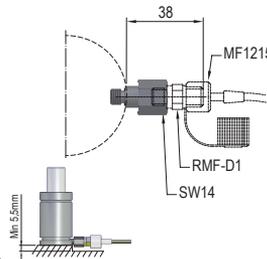


RMF-FH




Installation sample
Gas spring (linked) + RMF-T

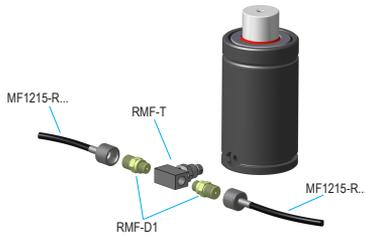


Installation sample
Gas spring (linked) + RMF-C



Installation sample
Gas spring (linked) + RMF-L

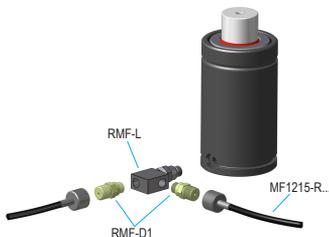

Installation sample
Gas spring (linked) + RMF-T-M6L

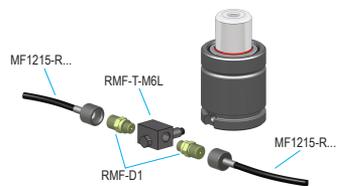

i

MICRO

TITAN

TPH

TPS

TPSP

TPF

TPK

TPC

TPR

TPB

TPHC

TPA

TPG

TPCT

TPSL

STOP CYLINDER

STOP CYLINDER

TPSR

TPSRS

TPNS

TPHT

TPHT

TPHT

TPHT

TPHT

TPHT


FLEXIBLE HOSE MF 1215-RR



How to order

MF1215-RR - 500

Code Length

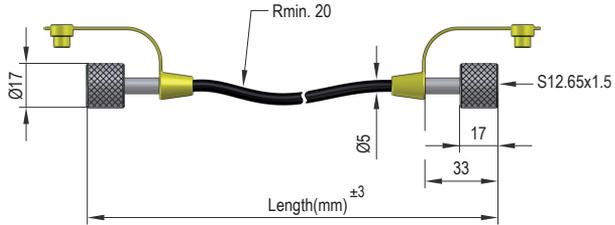

TECHNICAL INFORMATION

Max. working pressure	630 Bar
Max. working temperature	100 °C
Minimum length	100 mm


FLEXIBLE HOSE MF 1215-RC



How to order

MF1215-RC - 350

Code Length

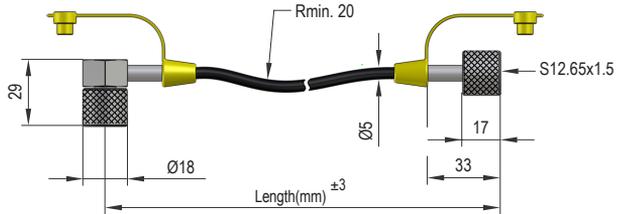

TECHNICAL INFORMATION

Max. working pressure	630 Bar
Max. working temperature	100 °C
Minimum length	120 mm


FLEXIBLE HOSE MF 1215-CC



How to order

MF1215-CC - 250

Code Length

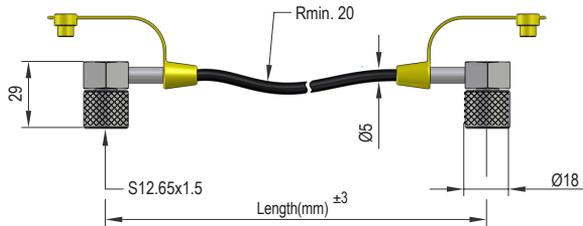

TECHNICAL INFORMATION



Max. working pressure	630 Bar
Max. working temperature	100 °C
Minimum length	120 mm

FLEXIBLE HOSE Other Configurations

How to order


MF1215-CC - 250 - 90°

Code Length Angle

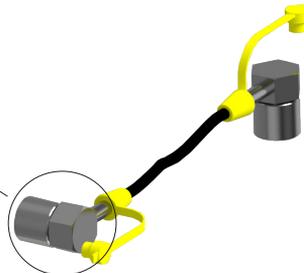




STRAIGHT CONNECTION TRMF1215

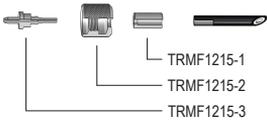


ANGLE CONNECTION TCMF1215

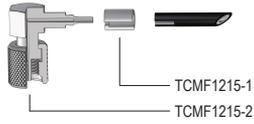

HOSE HMF1215



FLANGE FOR HOSE FIXTURE BL-1



HOSE INSTALLATION GUIDELINES

Avoid any type of damage on the hoses. Working with high pressure equipment is a serious task and should be done with a lot of respect. Accidents can be avoided with the necessary knowledge and caution.

i

MICRO

TITAN

TPH

TPS

TPSP

TPF

TPK

TPC

TPR

TPB

TPHC

TPA

TPG

TPCT

TPSL

STOP
CYLINDER


STOP
CYLINDER

TPSR


TPSRS

TPNS


TPHT

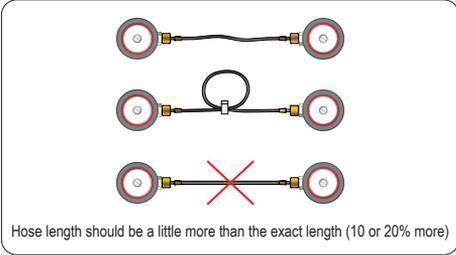


Hose length should be a little more than the exact length (10 or 20% more)

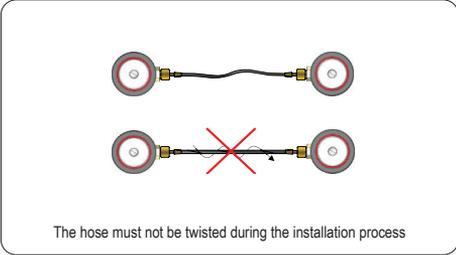


The hose must not be twisted during the installation process

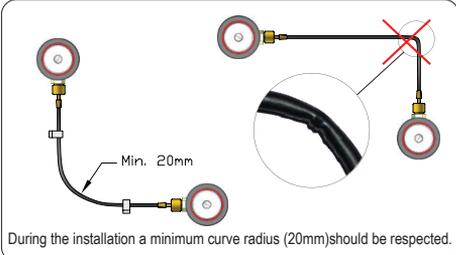


During the installation a minimum curve radius (20mm) should be respected.

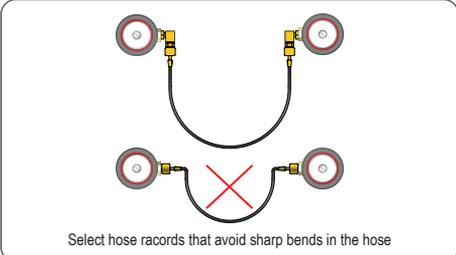

Select hose records that avoid sharp bends in the hose

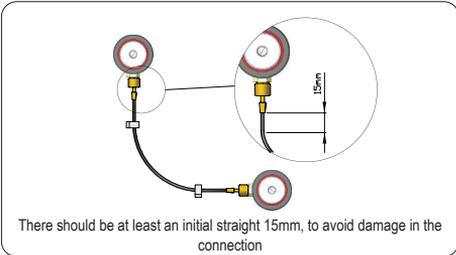

There should be at least an initial straight 15mm, to avoid damage in the connection

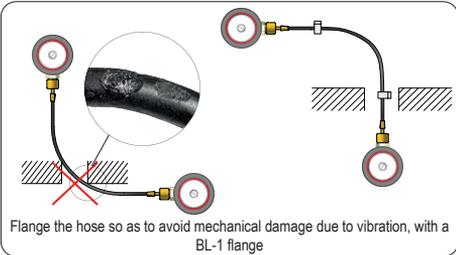

Flange the hose so as to avoid mechanical damage due to vibration, with a BL-1 flange




Don't hold the cylinder by the hose



Respect the maximum loading pressures



The hoses must be free of weight

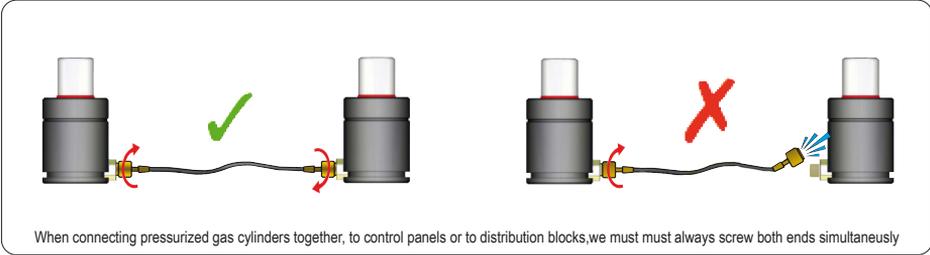

When connecting pressurized gas cylinders together, to control panels or to distribution blocks, we must always screw both ends simultaneously

HOSE INSTALLATION GUIDELINES

Avoid any type of damage on the hoses. Working with high pressure equipment is a serious task and should be done with a lot of respect. Accidents can be avoided with the necessary knowledge and caution.

i

MICRO

TITAN

TPH

TPS

TPSP

TPF

TPK

TPC

TPR

TPB

TPHC

TPA

TPG

TPCT

TPSL

STOP CYLINDER










STOP CYLINDER

TPSR





TPSRS

TPNS


TPHT

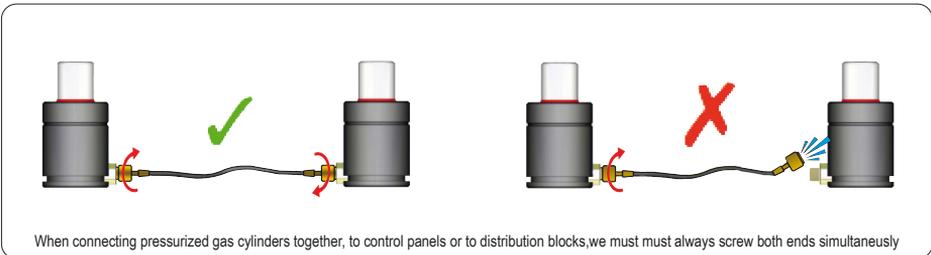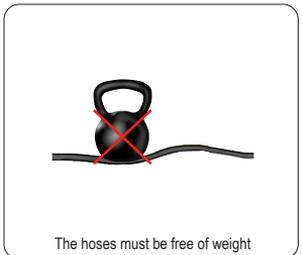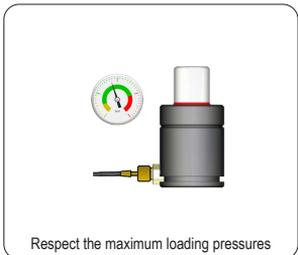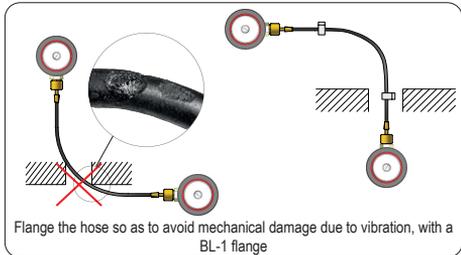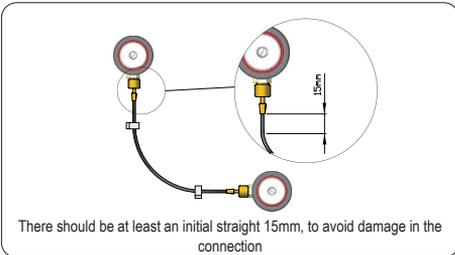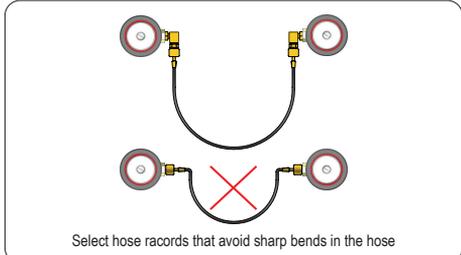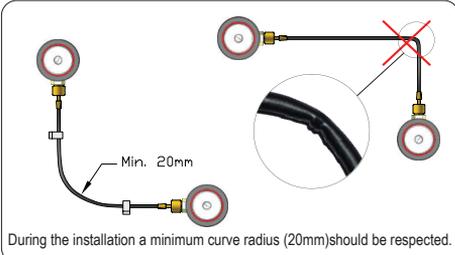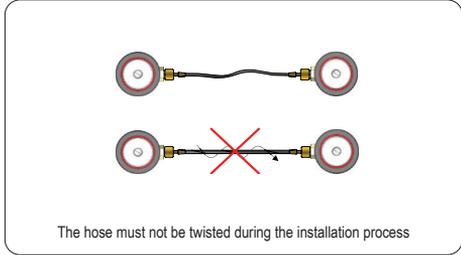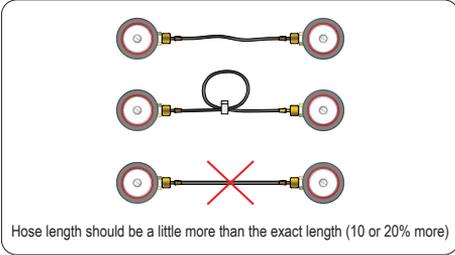

EXAMPLES OF INTERCONNECTED GAS SPRINGS

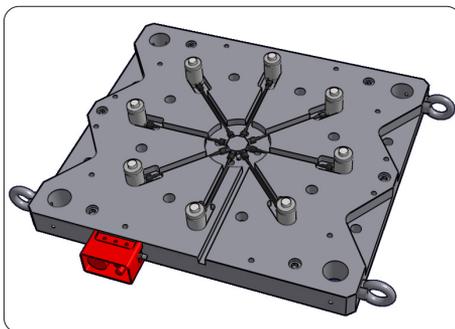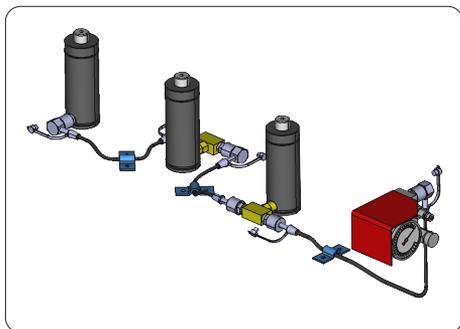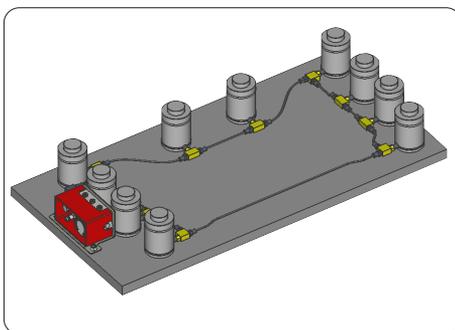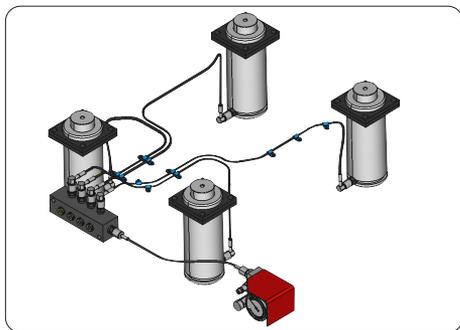
PARTS LIST:

- ▶ 6 off GAS SPRING TPS series
- ▶ 6 off racord RMF-T
- ▶ 12 off racord RMF-D1
- ▶ 1 off control panel P110
- ▶ 4 off MF1215-RR-200
- ▶ 1 off MF1215-RC-180
- ▶ 1 off MF1215-CC-600
- ▶ 1 off MF1215-CC-780

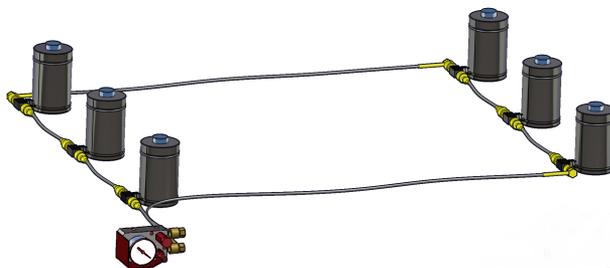

EXAMPLES OF INTERCONNECTED GAS SPRINGS

i

MICRO

TITAN

TPH

TPS

TPSP

TPF

TPK

TPC

TPR

TPB

TPHC

TPA

TPG

TPCT

TPSL

STOP
CYLINDER








STOP
CYLINDER

TPSR

TPSRS

TPNS


TPHT

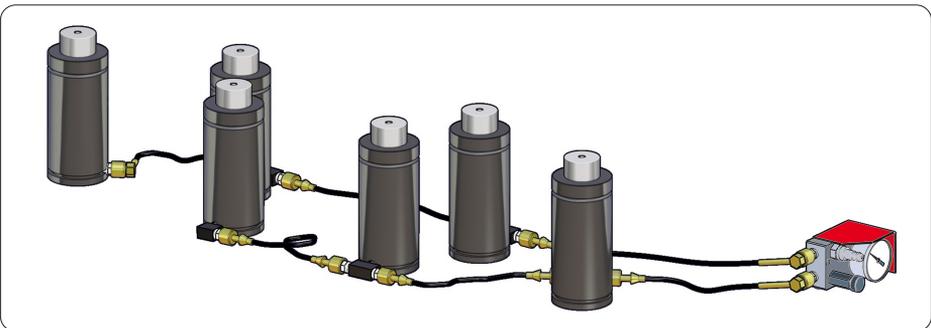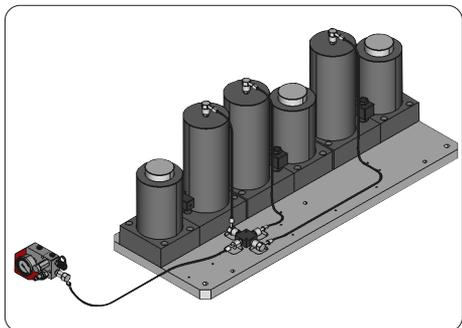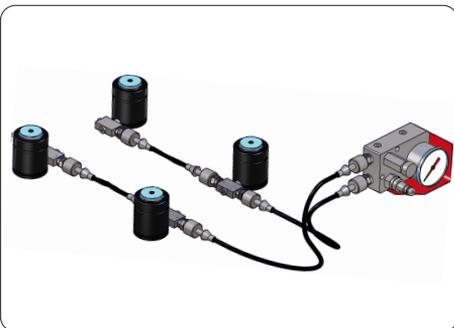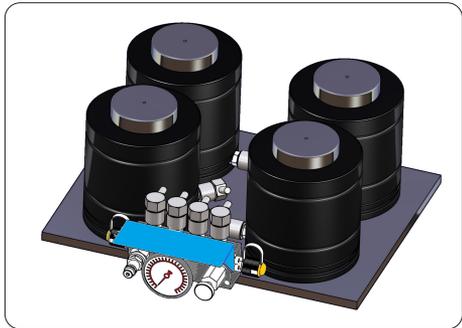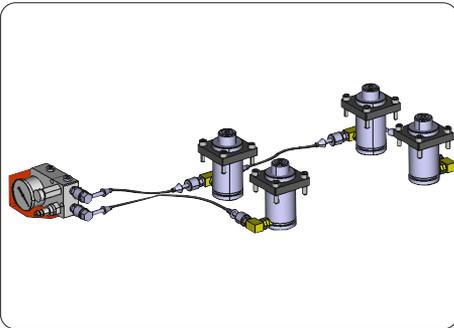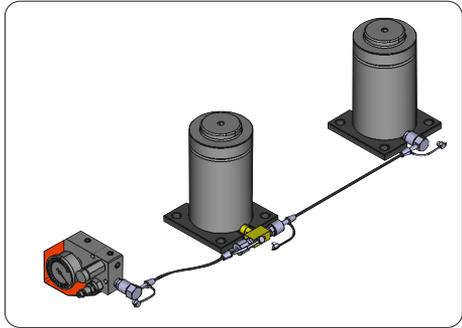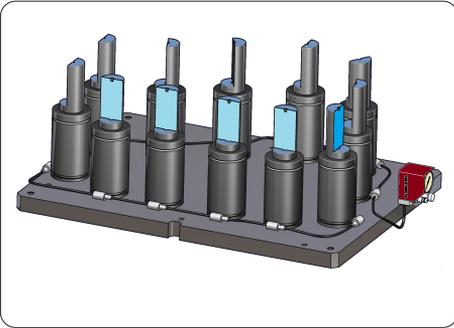


Seal 24° series




The new seal 24° series system, provides a completely sealed solution for connecting cylinder systems together. Standard G1/8 charging ports, in addition to the vast amount of racords and hose layouts available, always manages to find a solution for your need.

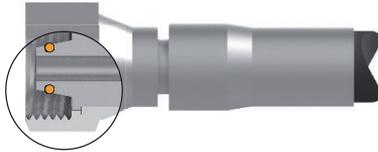


A-A detail




RC24-1

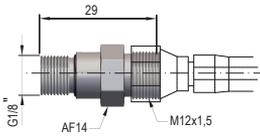


RC24-2




RC24-3




RC24-4

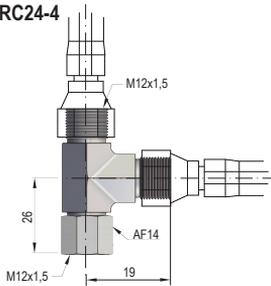


RC24-5

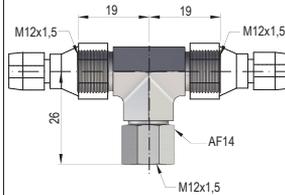


RC24-6

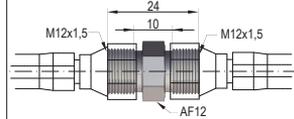


RC24-7

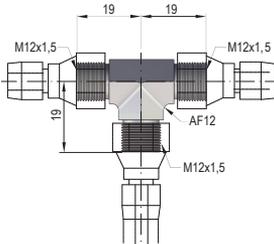

RC24-8

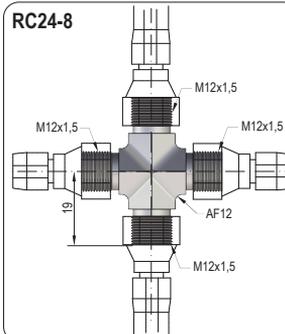

RC24-9



i

MICRO

TITAN

TPH

TPS

TPSP

TPF

TPK

TPC

TPR

TPB

TPHC

TPA

TPG

TPCT

TPSL

STOP

CYLINDER

STOP

CYLINDER

TPSR

TPSRs

TPNS

TPHT




H24-RR

How to order

H24-RR - 500

Code Length

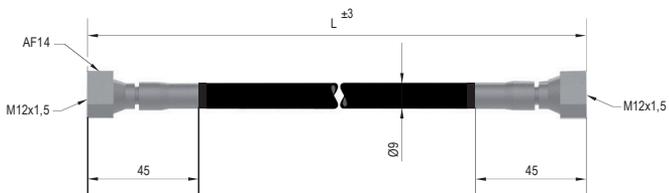


H24-R45

How to order

H24-R45 - 600

Code Length

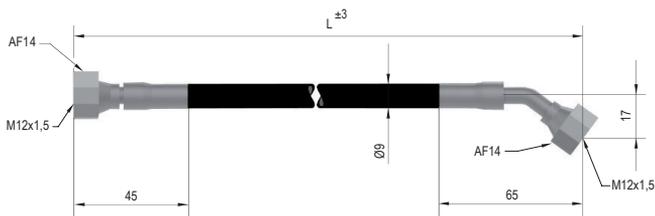


H24-RC

How to order

H24-RC - 400

Code Length

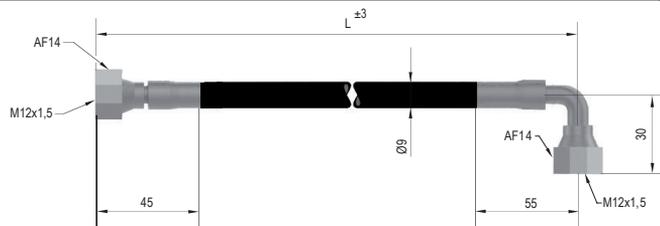


H24-CC

How to order

H24-CC - 1000

Code Length

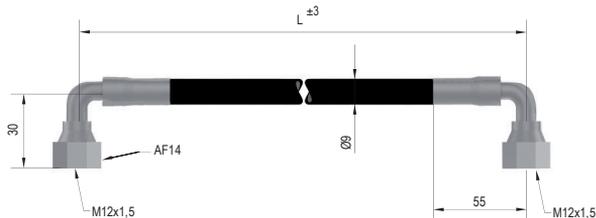


H24-C45

How to order

H24-C45 - 800

Code Length

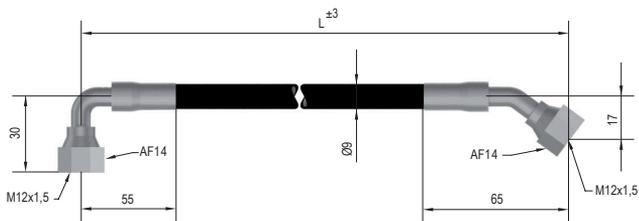


H24 - HOSE SPECIFICATIONS




-  5 mm
-  9 mm
-  350 bar
-  40 mm


H24-TR

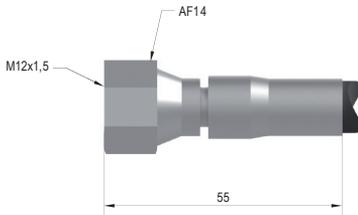


H24-T45

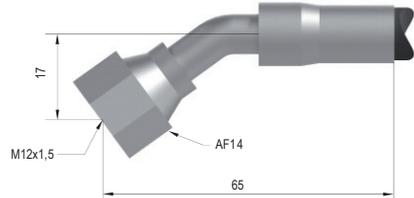

H24-TC

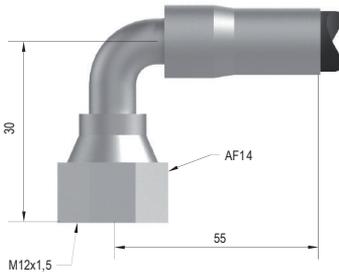


**FLANGE FOR HOSE FIXTURE
BMP**

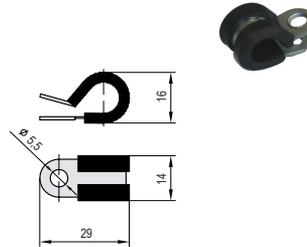


- i**
- MICRO
- TITAN
- TPH
- TPS
- TPSP
- TPF
- TPK
- TPC
- TPR
- TPB
- TPHC
- TPA
- TPG
- TPCT
- TPSL
- STOP CYLINDER
- STOP CYLINDER
- TPSR
- TPSRS
- TPNS
- TPHT
- 
- 
- 
- 
- 


RCF-1




RCF-2




RCF-3

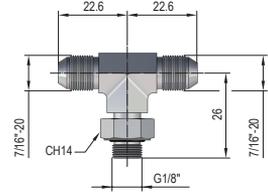


RCF-4

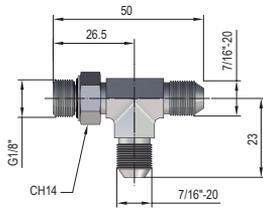


RCF-5




RCF-6




RCF-7




RCF-8




RCF-9

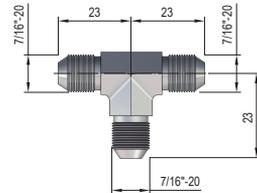


RCF-10




RCF-11

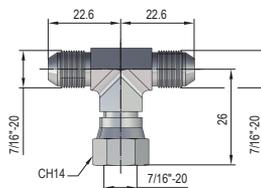


RCF-12



RCF-13



RCF-14

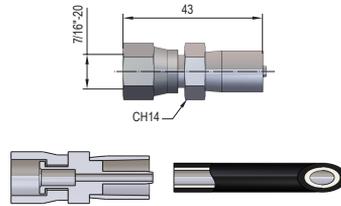

MPF HOSE SPECIFICATIONS



-  3,6 mm
-  8,1 mm
-  400 bar
-  12,7 mm




MP HOSE



How to order
MP-RR - 500

Code	Length
------	--------

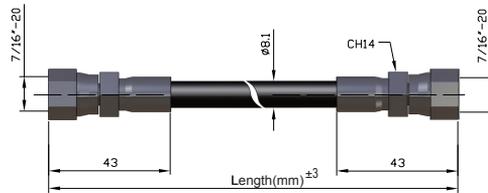

**FLANGE FOR HOSE FIXTURE
BMP**

